



THREE-POINT MOUNTED DISC MOWERS



EOS



● SUSPENSION SYSTEM

The new lift and suspension system allows the machine to be raised off the ground using the mower's hydraulic cylinder without the need to vary the set 3pt hitch height.

A compensating spring ensures the cutterbar will operate with the optimal ground pressure through a wide range of terrain and contours.



● SAFETY BREAKAWAY MECHANISM


Should an obstacle be encountered, the safety breakaway allows the mower to swing slightly rearwards reducing the impact load on the cutterbar. The device is simply reset in position by backing up.



● HYDRAULIC FOLDING SYSTEM

The mowing unit is folded vertically by a hydraulic cylinder for a compact, stable and safe transport.



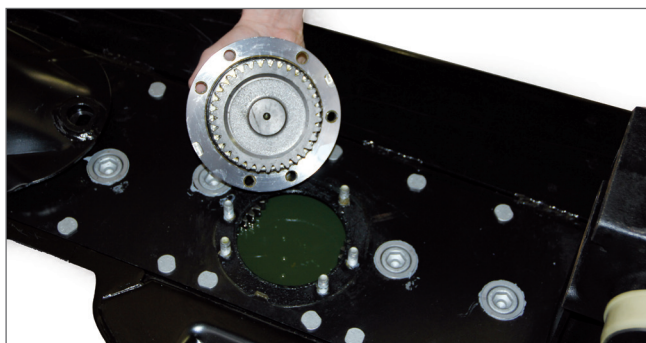

Fast and easy removal and installation of the disc bearing station for an easy and quick maintenance operation.



Cutter bar with low-profiled design; gears in oil bath made from high resistance steel; anti-wear skids.



Protection baffles in the knife overlap zones; profiled discs made from special steel allow better penetration in all type of forage.



Working angle of +40° and -35° for a perfect adaptation on terraces and banks. (EOS 165-210-245-285).

Specifications	EOS 165	EOS 210	EOS 245	EOS 285	EOS 320
Working width - cm	165	210	245	285	320
Number of discs	4	5	6	7	8
Number of blades	8	10	12	14	16
Pto	540/min	540/min	540/min	540/min	540/min
Safety release	standard	standard	standard	standard	standard
Required power (kw/hp)	22/30	27/36	32/43	42/55	64/85
Three point hitch	II	II	II	II	II
Pto shaft	standard	standard	standard	standard	standard
Vertical lifting	standard	standard	standard	standard	standard
Tractor hydraulic equipment	1 SE	1 SE	1 SE	1 SE	1 SE
Mowing angle with tilt of +40°/-35°	standard	standard	standard	standard	NO
Weight - kg	340	410	500	550	600

www.tonuttigroup.com

TONUTTI WOLAGRI S.p.A.

Head Office and Production Plant

Via Gino Tonutti 3 - 33047
Remanzacco (UD) Italy
Phone + 39 0432 667015
Fax + 39 0432 668282
info@tonuttigroup.com

Production Plant Suzzara

Via Veneto 12/A - 46029
Suzzara (MN) Italy
Phone +39 0376 51211
Fax +39 0376 522215
info@tonuttigroup.com

Tonutti U.S.A. Inc

1655 Panama Street
Memphis, TN 38108
Phone (901) 385 8841
Fax (901) 385 8288
info@tonuttiusa.com

Tonutti Russia T.W. Limited

3 Tekhnicheskaya Street
Perm, 614070 Russia
Phone 007 3422 909096
Fax 007 3422 909096
twltd@perm.ru

TONUTTI reserves the right to make changes or add improvements at any time without notice.
The information contained here in is general in nature and is not intended for specific application purposes.

