

COLUMBIA R10-R12

Contained pick-up dimensions (162 cm) and low center of gravity make this machine suitable for use in hilly and sloping zones.



COLUMBIA R98

Thanks to its 184 cm transport width (tyres 7,50-16) it is ideal for working in plots with narrow transit.

Adjustable pick-up wheel.
The second pick up wheel available upon request.



Reciprocating alternative packer.
It improves product introduction also on excessively sloping descends and with difficult products.

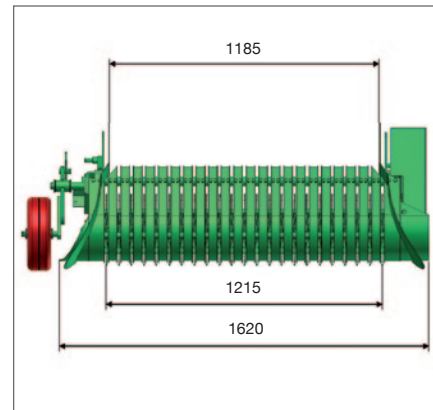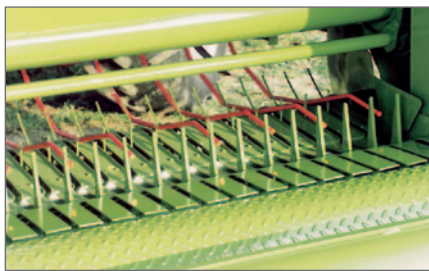

	R98	R10 EVO	R12 EVO
Bale diameter - cm	120	120	155
Bale width - cm	98	120	120
Pick-up width - cm	140	162	162
Feeding system	alternative packer	alternative packer	alternative packer
Adjustable pick-up wheels	1 in metal (standard) - 2 in rubber (optional)	1 in metal (standard) - 2 in rubber (optional)	1 in metal (standard) - 2 in rubber (optional)
Number of cross bars	32	32	43
Pto shaft	Shear bolt (standard)	Shear bolt (standard)	Shear bolt (standard)
Standard tyres	7,50-16	11,5/80-15,3	11,5/80-15,3
Lubrication (recommended)	optional	optional	optional
Swiveling eyebolt attachment Ø 35	standard	standard	standard
Road transport signaling kit	standard	standard	standard
Road homologation (Italy)	yes	yes	yes
Required power (kW/hp)	25/35	25/35	30/40
Dimensions-cm (L-W-H)	341x184x185	340x224x185	370x224x218
Weight - kg	1720	1910	2270

8930U011

www.tonutgroup.com

TONUTTI WOLAGRI S.p.A.

Head Office and Production Plant
Via Gino Tonutti 3 - 33047
Remanzacco (UD) Italy
Phone + 39 0432 667015
Fax + 39 0432 668282
info@tonutgroup.com

Production Plant Suzzara
Via Veneto 12/A - 46029
Suzzara (MN) Italy
Phone +39 0376 51211
Fax +39 0376 522215
info@tonutgroup.com

Tonutti U.S.A. Inc
1655 Panama Street
Memphis, TN 38108
Phone (901) 385 8841
Fax (901) 385 8288
info@tonuttiusa.com

Tonutti Russia T.W. Limited
3 Tekhnicheskaya Street
Perm, 614070 Russia
Phone 007 3422 909096
Fax 007 3422 909096
twltd@perm.ru



TONUTTI reserves the right to make changes or add improvements at any time without notice.
The information contained here in is general in nature and is not intended for specific application purposes.

COLUMBIA EVO





The chains and crossbars compression chamber withholds the entire product, leaves included. This system always guarantees a perfect rotation of the content. Also excellent for green products.

COLUMBIA R10-R12 2000 EVO

Large pick-up

The lateral pick-up augers allow working on wide swaths. Ideal for the harvesting of light products (straw, corn...). It comes standard with 2 rubber pick-up wheels and 2 hydraulic cylinders for the pick-up height management.





Rotary packer

Thanks to the high number of teeth, the rotary packer assures an even and continuous feeding of the product to the compression chamber. As an alternative, the reciprocating alternative packer can be supplied to improve the product feed on excessively sloping descends and with difficult products.




Emergency hydraulic brakes (optional)

They are connected to a single-acting distributor.

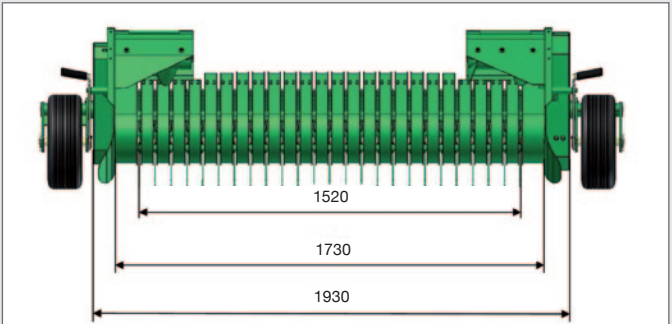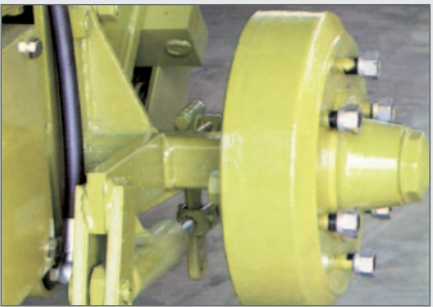

Pick up of 1.93 m with standard rubber wheels associated to a sturdy rotary packer (standard)

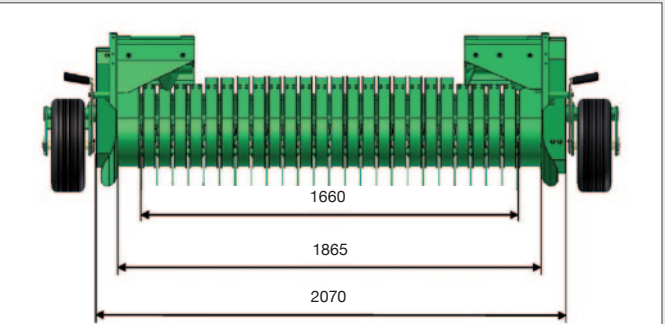

Pick-up of 2,07 m (optional)

Opening of the chamber

The press-seal of the chamber is hydraulic with a series of valves that allow to reach a high compression of the bale, also in case of overloads. Two through-rod cylinders quickly open the chamber that, by acting on a sturdy uncoupling, allows opening the machine without need to disconnect the PTO.



Lubrication system (optional)

Two pumps, one automatic that acts on the main transmissions and one manual that can be activated, when required, to lubricate the catenary avoiding contaminating the product.



Patented Safety Mechanism (option)

This patented safety mechanism grants the operator the maximum safety even in case that the normal usage manufacturer's prescriptions should not be followed. The mechanism consist in a safety bar connected in front of the pickup. When the safety bar is accidentally hit or voluntarily pushed, it instantly stops the machine transmission and the connected moving parts.



	R10 2000 EVO	R12 2000 EVO
Bale diameter - cm	120	155
Bale width - cm	120	120
Pick-up width - cm	193	193
Feeding system	rotary packer	rotary packer
Adjustable pick-up wheels	2 in rubber	2 in rubber
Number of cross bars	32	43
Pto shaft	Shear bolt (standard)	Shear bolt (standard)
Standard tyres	11,5/80-15,3	11,5/80-15,3
Lubrication (recommended)	optional	optional
Swiveling eyebolt attachment Ø 35	standard	standard
Road transport signaling kit	standard	standard
Road homologation (Italy)	yes	yes
Required power (kW/hp)	33/45	33/45
Dimensions-cm (L-W-H)	395x243x208	370x243x247
Weight - kg	2160	2550