



REAR MOUNTED DISC MOWER CONDITIONER



POLARIS



● SHOCK ABSORBERS

Double spring shock absorbers allow setting the best weight for the mower to maintain even pressure on the ground, always giving a clean cut without damaging the grassy surface.

● SAFETY RELEASE

The machines are all fitted with the "Non-Stop" safety release, which means you can continue cutting without stopping the machine and with no need to go backwards if an obstacle is found. It is automatically rearmed, without assistance from the operator or the hydraulic system.

● TRANSPORT POSITION

Standard transport the machine swings to rear. Optional transport the machine raises in vertical. The single acting cylinder is used to raise the mower for transport. It has an automatic lock that can be released with a rope from the tractor.





● **MAIN SUPPORT** 1

Assembled in one module to the cover with 6 bolts to maximize the strength of the support. It lets you easily inspect inside the cutter bar. Bearings with strong stress transmissibility (30mm pitch) can bear the greatest shear strains and the bearings are spaced to enhance resilience

2 Pinion thickness is 17 mm. and diameter of the shaft is 35 mm.


● **COVER**

Heavy thickness (5 mm) with an integrated reinforcement 3 This application helps prevent flexing, to avoid the twisting of moving parts, especially on uneven terrain. Oil capacity: this leads to an improved lubrication, a faster cooling and efficient movement. 4

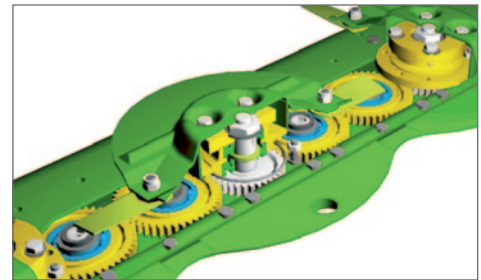
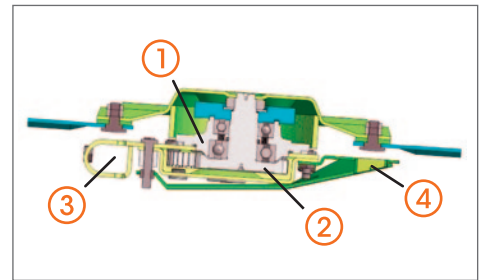


CUTTER BAR WITH CENTRAL PENDULUM ATTACHMENT

- Good distribution of cutter-bar weight.
- Better set-up to the terrain.
- Regular cutting on all the width
- Minimum width of transport.
- Reduced width of the cutter-bar

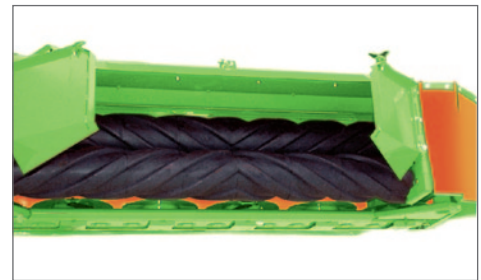

RUBBER ROLLER CONDITIONER (MODEL R)

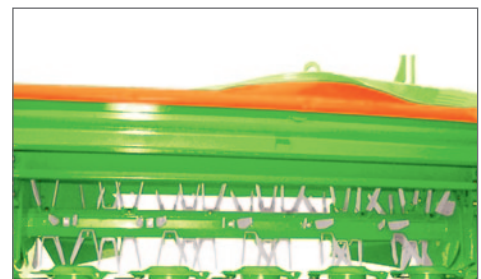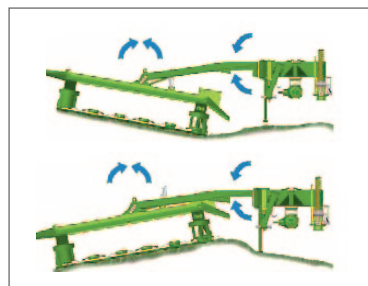

FINGER CONDITIONER (MODEL F)

POLARIS	245F	285F	320F	245R	285R	320R
Cutting width cm/ft	242	284	318	242	284	318
Weight kg	900	980	1060	980	1090	1160
Number of disks	6	7	8	6	7	8
Number of blades	6+6	7+7	8+8	6+6	7+7	8+8
Pto speed RPM	540/1000	540/1000	540/1000	540/1000	540/1000	540/1000
Pto power hp/kw	70/53	80/60	90/65	75/56	82/62	95/71
Conditioner	Finger	Finger	Finger	Roller	Roller	Roller

www.tonuttigroup.com

TONUTTI WOLAGRI S.p.A.

Head Office and Production Plant

Via Gino Tonutti 3 - 33047
Remanzacco (UD) Italy
Phone + 39 0432 667015
Fax + 39 0432 668282
info@tonuttigroup.com

Production Plant Suzzara

Via Veneto 12/A - 46029
Suzzara (MN) Italy
Phone +39 0376 51211
Fax +39 0376 522215
info@tonuttigroup.com

Tonutti U.S.A. Inc

1655 Panama Street
Memphis, TN 38108
Phone (901) 385 8841
Fax (901) 385 8288
info@tonuttiusa.com

Tonutti Russia T.W. Limited

3 Tekhnicheskaya Street
Perm, 614070 Russia
Phone 007 3422 909096
Fax 007 3422 909096
twltd@perm.ru